



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65D 75/58</b>	<b>A1</b>	(11) International Publication Number: <b>WO 96/19395</b>
		(43) International Publication Date: 27 June 1996 (27.06.96)

(21) International Application Number: PCT/US95/15782

(22) International Filing Date: 6 December 1995 (06.12.95)


(30) Priority Data:

08/359,155

19 December 1994 (19.12.94) US

(71) Applicant: THE PROCTER & GAMBLE COMPANY  
[US/US]; One Procter & Gamble Plaza, Cincinnati, OH  
45202 (US).(72) Inventors: GRUENBACHER, Dana, Paul; 1867 Harrogate Hill  
Lane, Fairfield, OH 45014 (US). WILES, Jerald, Ray; 4063  
Bent Tree Boulevard, Sarasota, FL 34241 (US).(74) Agents: REED, T., David et al.; The Procter & Gamble  
Company, 5299 Spring Grove Avenue, Cincinnati, OH  
45217 (US).(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH,  
CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE,  
KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK,  
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT,  
BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL,  
PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,  
ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW,  
SD, SZ, UG).**Published***With international search report.**Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

(54) Title: A FLEXIBLE PLANAR GUSSETED PACKAGE FOR DISPENSING A PRODUCT THROUGH A FITMENT

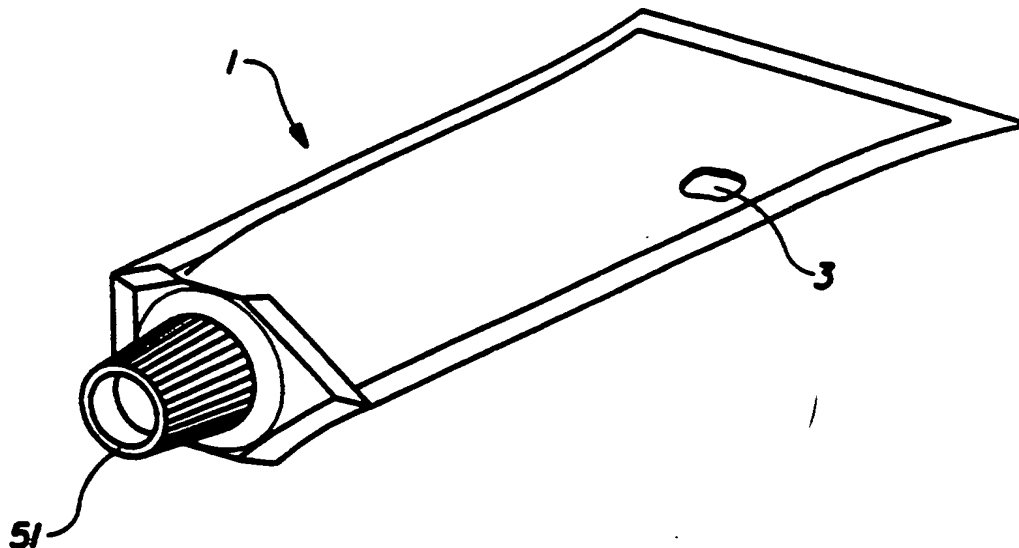

## (57) Abstract

In accordance with the present invention there is provided a flexible package (1) for dispensing a product through a fitment (30). The package has a planar enclosed body extending between a bottom end (5) and a top end (6). The package further includes a planar gusset panel (10) sealed to the body at the top end. The gusset panel is sealed to the body such that the package can be folded so that the gusset panel will lie flat against and in the same plane as the body of the package. The gusset panel further includes an aperture (15) disposed therein. A dispensing fitment (30) extends through the aperture on the gusset panel for dispensing.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## A FLEXIBLE PLANAR GUSSETED PACKAGE FOR DISPENSING A PRODUCT THROUGH A FITMENT

5

### FIELD OF THE INVENTION

The present invention relates to packages for storing and dispensing products especially fluid or paste type materials. More particularly, the invention relates to tube-like packages or pouches wherein the product is dispensed through a fitment.

### BACKGROUND OF THE INVENTION

10 For many years consumer products, such as toothpaste, have been stored and dispensed from tubes having dispensing fitments therein. Typically, these tubes are made from plastic laminates and are formed by heat sealing a round fitment within the tube or injection molding a fitment into the tube. In order to give these tubes the necessary rigidity that consumers prefer, or to make stand-up tubes, the plastic  
15 laminates are usually relatively thick (0.008 in. to 0.012 in.). Moreover, the tubes are typically manufactured at one site and then filled with product at another site in order to increase manufacturing reliability and to avoid capital equipment cost. Therefore, due to the amount of material used to make these tubes, the cost of the equipment and the manufacturing method used, these tubes are relatively expensive, especially for  
20 people residing in developing countries.

Recently, there has been the desire to package products such as toothpaste in flexible pouches which can be made from a broad range of thin plastic laminates or which can otherwise be manufactured less expensively. These materials and manufacturing methods are cheaper than the traditional methods mentioned above.  
25 When the amount of material used is reduced the package takes on more of a pouch appearance than that of a semi-rigid tube. Consumers have shown a preference towards pouches which have the appearance of a typical toothpaste tube and have a dispensing fitment conveniently located at the end of the package. Typically, this is done by sealing the fitment in the seal region of the pouch. One example of this is  
30 given in U.S. Patent 2,970,723 issued to Flax on February 7, 1961. However, making this type of package results in a complex sealing process which often causes leaks, especially when making it out of thin plastic laminates. Moreover, the size and design of the fitments required for these types of packages are expensive and often require split cavity side action molds to make them.

35 Other packages have a fitment sealed in the face of the package, such as the one shown in U.S. patent 4,601,410 issued to Bond on July 22, 1986. While this reduces the chances of having leaks because the fitment is not sealed in the seal area of the

pouch, dispensing from the package is not easy to control since the line of sight is hidden by the package. Moreover, packages with fitments sealed in the face lose their tube like appearance which is important to consumers. It is, therefore, desired to have a package where the fitment is at the end of the package but is not sealed in the sealed area of the pouch so that it provides good dispensing with little or no leaks.

One example of a pouch which overcomes the above problems is given in U.S. Patent 5,307,955 issued to Viegas on May 3, 1994 which is hereby incorporated herein by reference. This patent discloses a tubular package having a gusset panel sealed at its bottom and a self-sealing valve extending through the gusset panel. However, this package has two disadvantages for dispensing products such as toothpaste. First, as was said above, consumers have a desire for these packages to look as much like an ordinary toothpaste tube as possible. As seen from the figures of this reference, this package does not look much like an ordinary toothpaste tube. Second, because of the way the tubular body and gusset panel are sealed at the bottom end, it is difficult, especially for paste type products, to get all of the product out of the package.

There has, therefore, been a desire to provide a pouch having a dispensing fitment therein which looks very similar to an ordinary toothpaste tube and which lends itself to substantially complete emptying by the consumer. It is also desired to have such a pouch where the fitment is disposed on the end of the pouch and is not sealed to the pouch along the seal area.

### SUMMARY OF THE INVENTION

In accordance with the present invention there is provided a flexible package for dispensing a product through a fitment. The package has a planar enclosed body extending between a bottom end and a top end. The package further includes a planar gusset panel sealed to the body at the top end. The gusset panel is sealed to the body such that the package can be folded so that the gusset panel will lie flat against and in the same plane as the body of the package. The gusset panel further includes an aperture disposed therein. A dispensing fitment extends through the aperture on the gusset panel for dispensing.

In accordance with another aspect of the present invention there is provided a flexible package for dispensing a product through a fitment. The package has a substantially planar enclosed body having an interior for containing the product and an exterior. The body extends between a bottom end and a top end. The package includes a substantially planar gusset panel secured to the top end. The gusset panel has an opposing top and bottom and opposing sides wherein an aperture is disposed between the top, bottom and sides. Each of the sides of the gusset panel is sealed to

the body of the package by a substantially V-shaped seal wherein the seal points away from the aperture. The seals are such that the body of the package can be folded so that the gusset panel will lie flat against and in substantially the same plane as the body. Lastly, the package includes a dispensing fitment extending through the aperture in the gusset panel.

### BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the subject invention it is believed that the same will be better understood from the following description when taken in conjunction with the accompanying drawings in which:

Figure 1 is a perspective view of the package of the present invention showing the package filled with product and sealed..

Figure 2 is a perspective view of the package shown in Figure 1 but showing the package before it is filled and sealed..

Figure 3 is a plan view of the gusset panel 10 of the package of the present invention.

Figure 4 is a plan view of web 50 of which the package shown in the above Figures is made from.

Figures 5A-5C are side views of the web of Figure 4 showing different stages of the formation of the package.

Figure 6 is a plan view of the package of the present invention showing the package as it appears in Figure 5C and after the V-shaped seals are formed.

Figure 7 is a side view of an alternative embodiment of the present invention.

Figure 8 is a perspective view of the package shown in Figure 7 showing the gusset panel folded onto the body.

### DETAILED DESCRIPTION OF THE INVENTION

Referring to the drawings in detail wherein like numerals indicate the same element throughout the views there is shown in Figure 1 a flexible package 1 for dispensing a product such as toothpaste. Figure 1 shows the package as it appears after being filled with product and sealed. Figure 2 shows the package 1 before it is filled with product and sealed. As seen from that figure, package 1 has a substantially planar enclosed body 2 having an interior 3 and an exterior 4. The body extends between a bottom end 5 and a top end 6. The package further includes a substantially planar gusset panel 10 sealed to the body at the top end. As is explained below for the embodiment shown in Figures 1 and 2 gusset panel 10 is what is referred to as a W-

gusset or T-gusset panel which is integral with the body 2. However, the gusset panel could be a separate piece sealed to the body.

The gusset panel 10, as best seen from Figure 3, has an opposing top and bottom 11 and 12 and opposing sides 13 and 14. An aperture 15 is disposed between the top, bottom and sides. In a preferred embodiment, each of the sides 13 and 14 of gusset panel 10 is sealed to the body 2 of the package 1 by a substantially V-shaped seal, 23 and 24, wherein the V points away from the aperture 15. This V-shaped seal provides for the tapered tube shape at the top which consumers are accustomed to and acts and looks like the shoulder of a conventional toothpaste tube. Furthermore, the V-shape seals increase the structural strength/rigidity to reduce the flexing of the package near the gusset panel when the cap 51 is removed.

As seen from Figure 2, seals 23 and 24 are such that the body of the package can be folded along points adjacent to the top 6 along a line running from side 13 to side 14 so that the gusset panel 10 will lie flat against and in substantially the same plane as the body 2 of package 1. This feature is important because a gusset panel which behaves in this manner lends itself to more complete emptying of the package. Typically the product is dispensed by squeezing the body 2 so that the product is dispensed through the fitment 30. As the package nears the end of its life most of the product is concentrated near the bottom. A gusset panel which can lie flat, as mentioned above, makes it easier to more completely empty the package. Because the gusset panel is flat before the package is filled with product, it can return to its flat condition when the package nears its end so that substantially all of the product can be expelled.

The package includes a dispensing fitment 30 extending through the aperture in the gusset panel for dispensing the product. Fitment 30 can be of any type well known in the art such as flip tops or the like. The one shown in the figures is an externally threaded round plastic fitment sealed to the gusset panel and which cooperates with an internally threaded closure 51 (shown in Figure 1).

It is preferable that gusset panel 10 and the body 2 are integral with one another. That is, gusset panel 10 and body 2 are made from a single substantially rectangular web of flexible material 50, as shown in Figure 4. Web 50 can be made from any number of materials known in the art. Preferably materials that run well on form/fill/seal equipment. These films preferably have a laminate structure where the outside layer has a significantly higher melting point than the inside sealant layer. This allows the W-gusset to be heat sealed without the exterior layers becoming heat sealed together in the forming process. This also provides for faster line speeds at higher temperatures. Some examples of preferred films are 25 to 75 microns of Low Density

Polyethylene or Medium Density Polyethylene as the inner sealant layer followed by a suitable barrier layer, if needed, and 9 to 20 microns or Polyethylene Terephthalate or Oriented Polypropylene for the heat resistant exterior layer required for fast high temperature seals. The preferred total thickness of web 50 ranges from about 100 to 254 microns total thickness depending on the size and desired feel of the package.

As was stated earlier, web 50 will be folded and sealed such that it will form body 2 and gusset panel 10. Web 50 has opposing major peripheral edges 51 and 52 and opposing minor peripheral edges 53 and 54. Aperture 15 is between the major and minor peripheral edges. The gusset panel is made by folding the web 50 in the same direction on each side of the aperture along a line substantially parallel to the minor peripheral edges. This is commonly referred to in the art as a W-gusset. These two folds, 41 and 42, are shown in Figure 5A. After the folds 41 and 42 are made, minor peripheral edges are pulled away somewhat to allow fitment 15 to be placed therein, as shown in Figure 5B, so that the web is folded towards the seal region 31 of the fitment 30. Thereafter the folds are brought back to their original position and are compressed in the direction of arrows F and sealed as shown in Figure 5C, thereby creating gusset panel 10. Preferably, the fitment is sealed in the flat web first and the W-gusset is formed as shown in Figure 5C by using any type of suitable equipment known in the art including forming boards or shoulders. However, for thicker films it is helpful to make the folds first and then insert the fitment.

As seen from Figure 6, after the W-gusset is made, folds 41 and 42 are compressed and sealed together in areas adjacent to the sides 13 and 14 of the gusset panel 10 so as to form the substantially V-shaped seals 23 and 24. This is best shown by referring to Figure 6. The seals can be created by any number of methods known in the art including hot bar heat sealing, impulse sealing, ultrasonic or hot wire. This leaves ears 43-46 extending from the gusset panel 10. It is preferred that the ears be trimmed off, as shown in Figures 1-3, so that the package has a more tube like appearance.

Either before, after or while the folds 41 and 42 are sealed and the gusset panel is formed, the minor peripheral edges 53 and 54 are brought together to be adjacent one another as seen in Figure 5C. This creates a front 64 and back 65 of the package which juxtapose each other as shown in Figures 2, 5C and 6. As seen from Figure 2, the web is sealed along its major peripheral edges 51 and 52 to form the enclosed planar body. Preferably sealing of the major peripheral edges is done by hot bar, ultrasonic, impulse seal, hot wire or the like and the corners 18 and 19 of the gusset are again sealed when the major peripheral edges are sealed to better ensure the integrity of the package especially in the gusset region where the overall package thickness goes

from four layers to two layers. Furthermore, it is desired to seal the major peripheral edges so as to eliminate the seal lines, 35 and 36 shown in Figure 2, and give the package a more smooth appearance. This can be accomplished with hot wire seals creating a line seal. The line seal minimizes the seal width of the fin seals and provides  
5 a more tube like appearance and feel to the package. Preferably, there will be no sharp corners on the package which can be accomplished by rounding the edges of the package using cutting dies with the desired rounded shape. Another preferred approach is to make standard fin seals (0.125 in to 0.375 in. wide) and then round the edge of the fin seals heat (flame, hot wire or some other source) or mechanical  
10 abrasion. After sealing, the package than then be filled with product from the bottom 3 and the minor peripheral edges 53 and 54 can be sealed so that the package appears as it does in Figure 1.

The gusset panel can be a separate piece which is sealed to the tubular body. The package could also be made similar to the package disclosed in the herein before  
15 incorporated U.S. Patent 5,307,955. However the stand up base of that package would have to be cut away so as to allow the body of the package can be folded, as described above that the gusset panel can lie flat against and in substantially the same plane as the body 2 of package 1.

As seen Figure 1 it is preferred that after the package is filled with product the  
20 gusset panel expands outwardly to give the package a more tube like appearance and for better dispensing. The distance that the gusset expands outwardly is governed by the width 61 (shown in Figure 6) of the gusset panel. Increasing the gusset width will provide more film for the gusset to expand outwardly when the package is filled. The angle 60 (shown in Figure 3) of the V-shape seals is ideally the minimum angle to allow  
25 the V-seal to go out to top 11 and bottom 12 without interfering with the fitment. Keeping the angle to a minimum will provide more torsion strength to the gusset panel when the consumer screws on or off the cap. Moreover, by minimizing the angle 60 the gusset tapers more, thereby giving the package a more tube like appearance and making complete emptying of the package easier.

However, the angle could be 180 degrees, thereby going from a V-shaped  
30 seal to a straight seal extending along the sides 13 and 14 of the gusset panel. An example of this embodiment is shown in Figures 7 and 8 where there is shown a package 101 which is similar to package 1. Package 101 has a planar enclosed body 102 extending between a bottom end 105 and a top end 106. Package 101 has a  
35 planar gusset panel 110 sealed to the body at the top end 106. As shown in Figure 8, gusset panel 110 is sealed to the body such that the package can be folded so that the gusset panel will lie flat against and in the same plan as the body of the package.



The gusset panel further includes an aperture 115 disposed therein. A dispensing fitment 151 extends through the aperture on the gusset panel for dispensing.

The difference between packages 1 and 101 is that while gusset panel 110 is still created by a W-gusset and formed very much the same way as described above, package 101 has straight seals 123 and 124 along the sides of the gusset panels instead of V-shape seals 23 and 24.

While particular embodiments of the present invention have been illustrated and described the various modifications would be apparent to those skilled in the art without departing from the spirit and scope of the present invention. Accordingly, the scope of the present invention should be considered in terms of the following claims and is understood not to be limited to the details described and shown in the specification and drawings.

**WHAT IS CLAIMED IS:**

1. A flexible package for dispensing a product through a fitment, the package has a substantially planar enclosed body extending between a bottom end and a top end, the package characterized by:

a substantially planar gusset panel sealed to the body at the top end, such that the package can be folded so that the gusset panel will lie flat against and in substantially the same plane as the body, the gusset panel further having an aperture disposed therein and a dispensing fitment extends through the aperture on the gusset panel.

2. The package according to Claim 1 wherein the gusset panel is integral with the body.

3. The package according to Claim 2 wherein the gusset panel and the body comprise a substantially rectangular web of flexible material having opposing major peripheral edges and opposing minor peripheral edges, the aperture being between the major and minor peripheral edges, the web being folded so as to create a front and a back of the package which juxtapose each other, the minor peripheral edges being adjacent to each other forming the bottom and the web being sealed along the major peripheral edges thereby forming the enclosed body, the gusset panel comprising two folds one adjacent each of the front and the back of the package, the folds being compressed and sealed in areas adjacent to the sides of the gusset panel.

4. The package according to any of the previous Claims wherein each of the sides of the gusset panel are sealed to the body of the package by a substantially V-shape seal pointing away from the aperture.




5. The package according to any of the previous Claims wherein the dispensing fitment comprises a round externally threaded member.

6. The package according to any of the previous Claims wherein the body and the gusset panel are made from a plastic laminate having a thickness ranging from about 100 microns to about 254 microns.

7. The package according to any of the previous Claims wherein the gusset panel can expand outwardly when the package is filled with product and sealed.

6. The package according to any of the previous Claims wherein the package is filled with a paste product and the top and bottom of the package are closed.

1/5

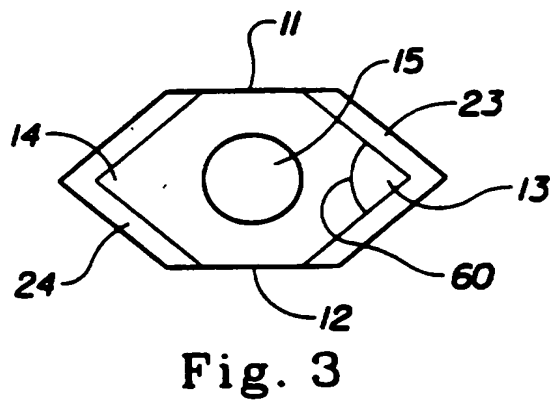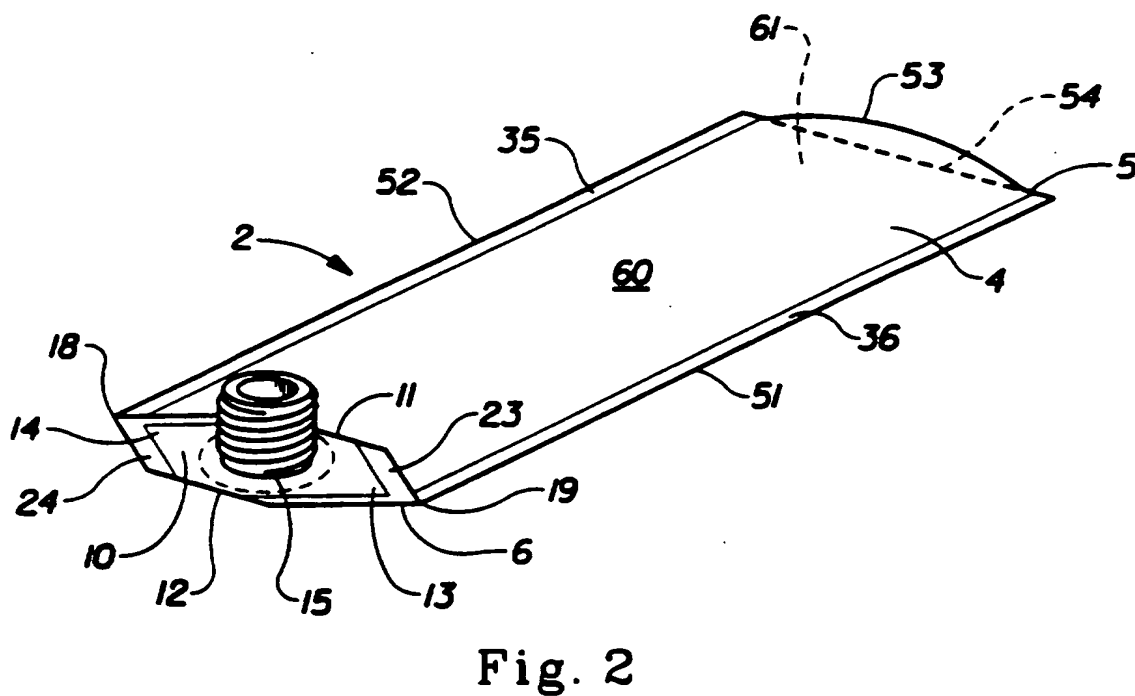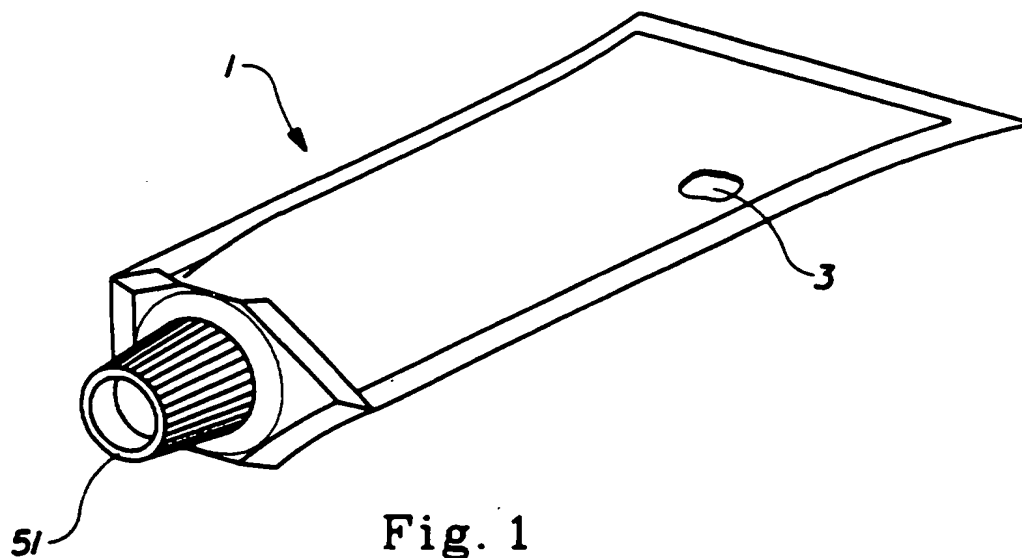

2/5

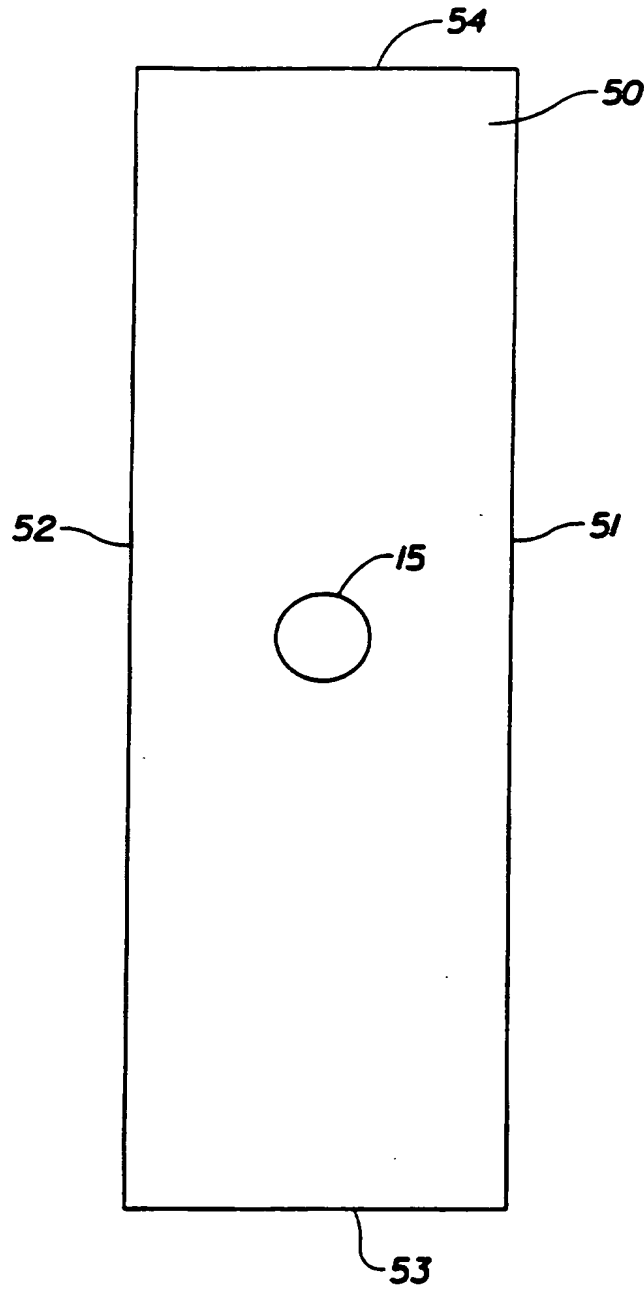


Fig. 4

3/5

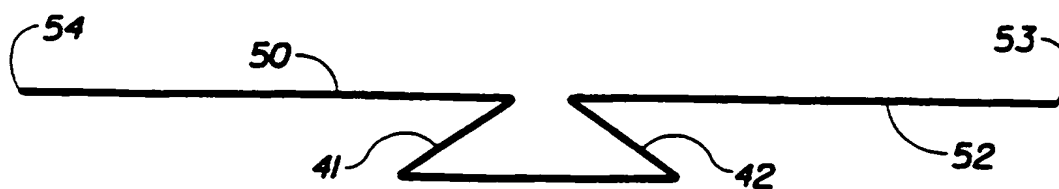


Fig. 5A

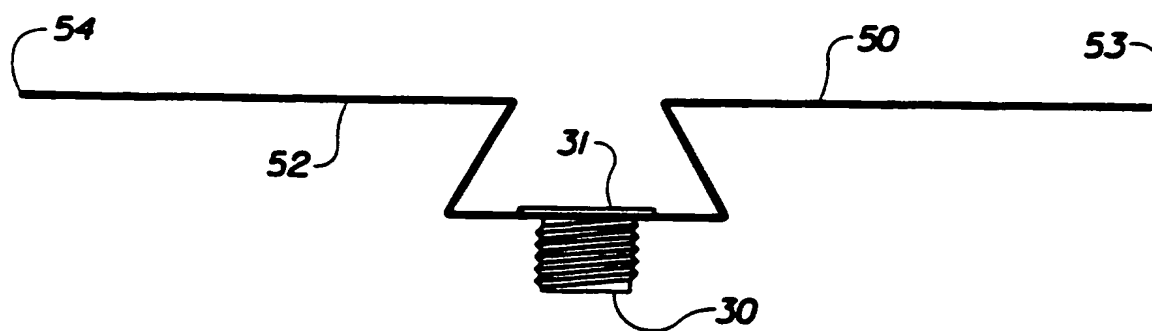


Fig. 5B

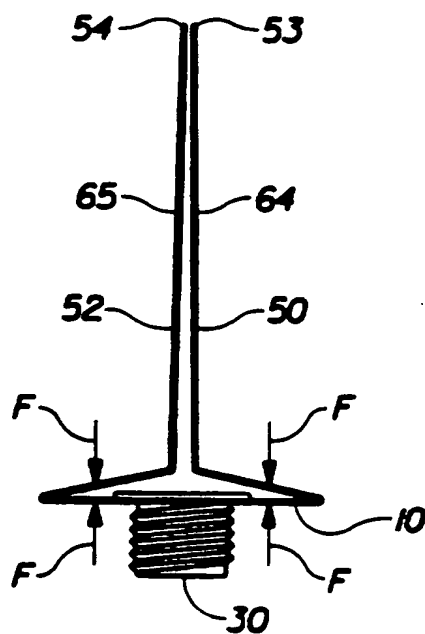


Fig. 5C

4/5

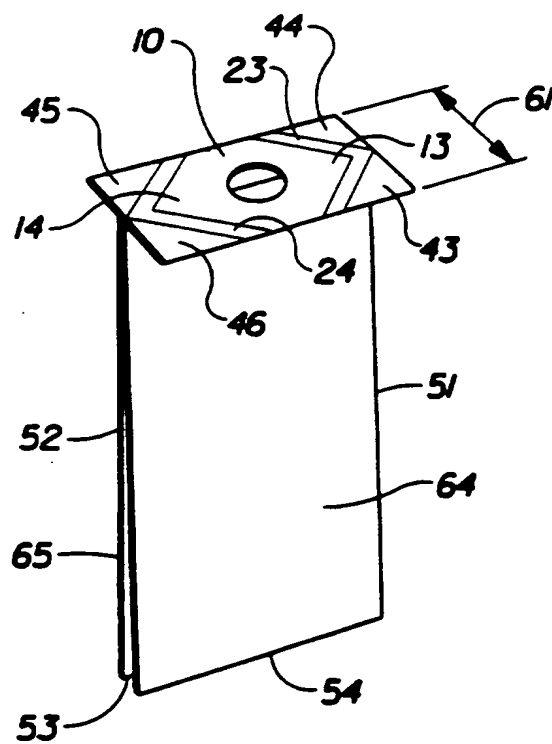


Fig. 6

5/5

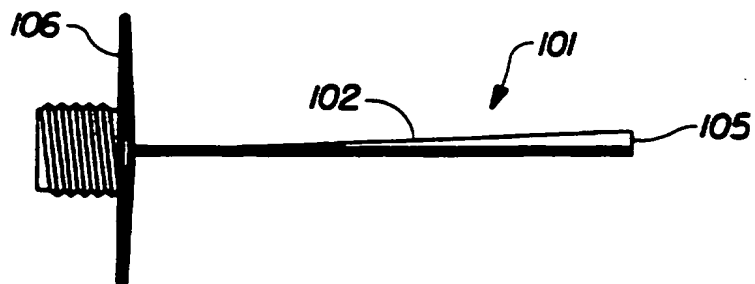


Fig. 7

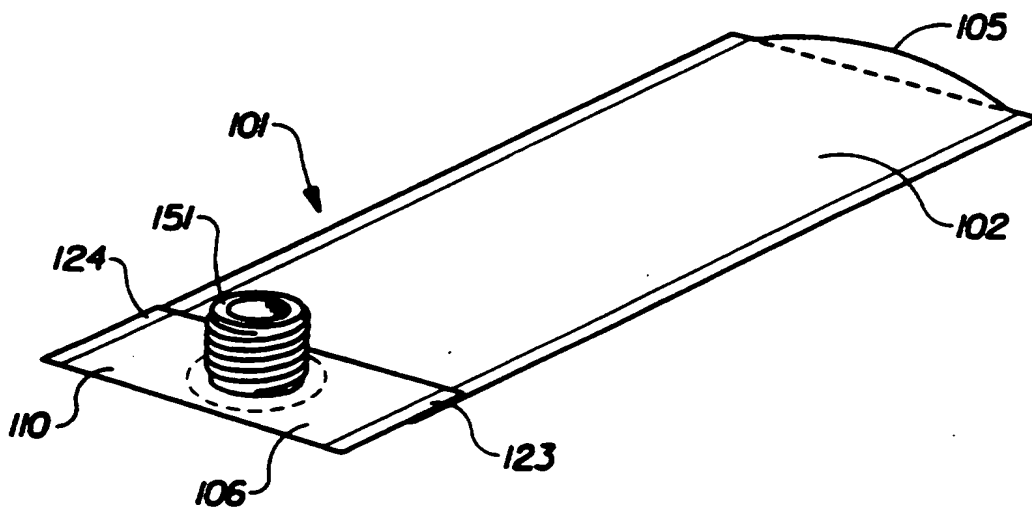


Fig. 8



## INTERNATIONAL SEARCH REPORT

Int. l. Application No

US 95/15782

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B65D75/58

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	DE,A,39 25 379 (HOECHST) 3 January 1991 see the whole document ---	1,4-7 2,3
X	GB,A,805 631 (RADO) 10 December 1958  see page 1, line 8 - line 86; figures ---	1,2,5,7, 8
Y	WO,A,94 02370 (JEBCO PACKAGING SYSTEMS) 3 February 1994 see figures 29-42 -----	2,3

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

15 April 1996

Date of mailing of the international search report

26.04.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Bridault, A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 95/15782

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A-3925379	03-01-91	DE-U- 8908015 DE-U- 9006744	10-08-89 23-08-90
GB-A-805631		NONE	
WO-A-9402370	03-02-94	US-A- 5273362 AU-B- 4630293 CA-A- 2140555 CN-A- 1082986 EP-A- 0650442 JP-T- 8501992 US-A- 5468206	28-12-93 14-02-94 11-01-94 02-03-94 03-05-95 05-03-96 21-11-95